



CENTURION CLASSIC PORTAL



SECURE

Security portals are designed to physically stop tailgating in unmanned situations, and provide a greater level of security than traditional turnstiles or speedgates.

They operate by the first door opening, and the authorised person proceeds into the portal. The first door closes, and the anti-tailgating system checks only one person is in the portal. Once this check is complete, and any additional security checks have been passed, the second door opens to let the authorised person into the secure area.

Centurion portal door interlock technology ensures at least one door is closed at all times to restrict access. To prevent tailgating, the portal checks the entrant's weight against pre-set thresholds. If the weight exceeds the threshold, the Dynamic Weighing Software analyses how the weight has entered the portal. To protect against vandalism or attacks, the portal is made of attack and bullet resistant glass with options for higher rated solutions.

SAFE

The portal can be set to have both doors open for certain operational hours or deliveries. Other safety features include integration to the fire alarm, battery back-up to provide continued operation in case of power failures, internal anti-panic button to power down the last door opened so it can be manually opened, and IR safety sensors to check the door way is clear before closing. The portals come with an internal intercom for communication with security or reception teams. They also offer a VIP mode whereby the tailgate detection system is turned off for certain users.

KEY FEATURES

- ✓ Lowest cost and small footprint
- ✓ Designed to stop tailgating and piggyback attempts
- ✓ Sophisticated tailgate detection technology
- ✓ Highly reliable and most popular model
- ✓ Internal lighting
- ✓ Attack and bullet resistant glass options
- ✓ Door Interlock System to ensure one door is closed at all times
- ✓ Voice communication to guide users
- ✓ Remote control panel with intercom

www.entrancecontrol.com.au

CENTURION CLASSIC PORTAL SPECIFICATIONS




ABOUT THE CENTURION CLASSIC PORTAL


The Centurion Classic portal was designed to provide a high level of security, yet still be a user-friendly option for your welcome visitors. It ensures strict access control in unmanned areas with a built-in system that can detect guns entering the cabin if you're looking for elevated security for your building.

While anti-tailgating security is of the highest importance with this portal design, a sleek aesthetic is still kept in mind. It features curved laminated glass panels that will complement the look and feel of your facility.


It features digital voice communication to help guide users through the portal, and there's a control panel with an intercom system if needed. It has accident prevention sensors and a weight control system to detect more than one person in the portal at any given time.



STANDARD CLASSIC PORTAL

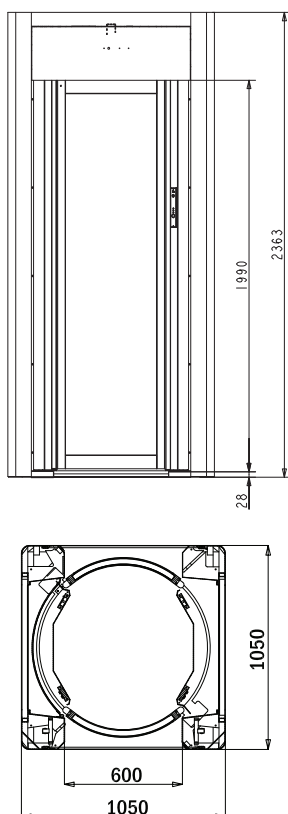

CLASSIC PORTAL VARIANT

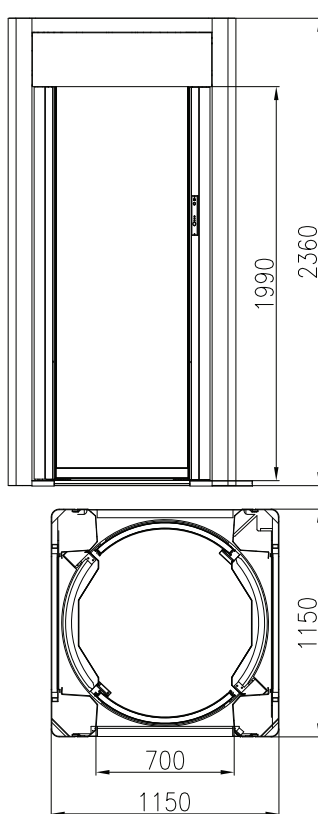

CENTURION CLASSIC PORTAL

Door opening size	600mm
Standard glass Thickness	Entry/exit glasses 27mm thick
Rating	BR3 (EN 1063), P6B (EN 356)
Optional glass thickness	Lateral glass 27mm thick
Rating	BR3 (EN 1063), P6B (EN 356)
Certification	None
Tailgate detection technology	Weight check
Door action	Motorised
DDA	No
Height	2360
Width	1050
Depth	1050
Standard finish	Paint finish and RAL colour
Bottom step height	25
Optional finishes	Brush or polished stainless steel, coloured stainless steel, brass, bronze, custom paint finishes
Throughput	6 people per minute
Option	Metal detector
Variant	Classic W
Variant benefit	700mm door opening for more space

Options:

- Disassembled booth
- Laterals glasses in class BR3/S(EN1063), P6B (EN356)
- Floor frame for the booth fixing to ground
- Extension to increase the booth total height
- Metal upper cover
- Metal detector placed inside the structure with automatic reset after each alarm
- 7 Ah built-in battery backup
- Additional key for first entry
- Internal/external support either for card or proximity reader
- Internal microcamera
- Door opening radar
- Biometric identification
- CCTV
- Additional console
- Input/output card (I/O)
- Wooden box packaging
- Electronic passive heating system that is thermostated for low temperatures.

Specifications subject to change without prior notice.