

CENTURION CYLINDRICAL SECUREDOOR



SECURE

The SecureDoor range is designed to physically stop tailgating in unmanned situations, and provide a greater level of security than traditional turnstiles or speedgates.

They operate by the first door opening, allowing the authorised person to proceed into the portal. The first door closes, and the anti-tailgating system checks only one person is in the portal. Once this check is complete, and any additional security checks have been passed, the second door opens to let the authorised person into the secure area.

Centurion SecureDoor interlock technology ensures at least one door is closed at all times to restrict access. To prevent tailgating, the portal checks the entrant's weight against pre-set thresholds. If the weight exceeds the threshold, the Dynamic Weighing Software analyses how the weight has entered the portal. To protect against vandalism or attacks, the portal is made of attack and bullet resistant glass with options for higher rated solutions.

SAFE

The SecureDoor can be set to have both doors open for certain operational hours or deliveries. Other safety features include integration to the fire alarm, battery back-up to provide continued operation in case of power failures, internal anti-panic button to power down the last door opened so it can be manually opened, and IR safety sensors to check the door way is clear before closing. The portals come with an internal intercom for communication with security or reception teams. They also offer a VIP mode whereby the tailgate detection system is turned off for certain users.

KEY FEATURES

- ✓ Aesthetic design
- ✓ Small footprint
- ✓ Designed to stop tailgating and piggyback attempts
- ✓ Sophisticated tailgate detection technology
- ✓ DDA compliant option
- ✓ Internal lighting
- ✓ Attack and bullet resistant glass options
- ✓ Voice communication to guide users
- ✓ Remote control panel with intercom
- ✓ Door Interlock System to ensure one door is closed at all times

CYLINDRICAL SECUREDOOR SPECIFICATIONS



ABOUT THE CENTURION CYLINDRICAL SECUREDOOR


The Centurion Cylindrical SecureDoor is unique and stylish thanks to its curved glass panels and round base. It has a small footprint and polished design so it will fit in with the architecture of almost any facility.

The Cylindrical SecureDoor is a sleek portal that helps to maintain the security of your building. It has interlocking doors and a weight check to ensure only one person is in the portal at a time, ultimately helping prevent tailgating in unammned areas.


It features digital voice communication to help guide users through the portal, and there's a control panel with an intercom system if needed. There is a DDA Cylindrical SecureDoor option if your facility requires it, as well as internal lighting for a more user-friendly experience without jeopardising the security of your facility.



STANDARD CYLINDRICAL SECUREDOOR

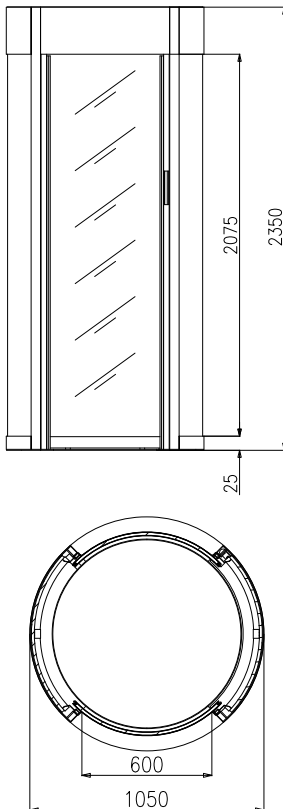

CYLINDRICAL SECUREDOOR VARIANT

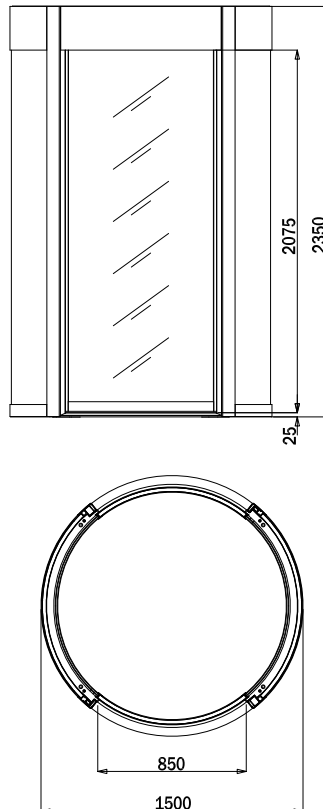

SPECIFICATIONS

Door opening size	600mm
Standard glass thickness	entry / exit glasses 22mm thick
Rating	BR2 (EN 1063), P6B (EN 356)
Optional glass thickness	27 mm thick
Rating	BR3 (EN 1063), P6B (EN 356)
Certification	See variant
Tailgate detection technology	Weight check
Door action	Motorised
DDA	No (see variant)
Height	2350
Width	1050
Depth	1050
Standard finish	Paint finish and RAL colour
Bottom step height	25
Optional finishes	Brush or polished stainless steel, coloured stainless steel, bras, bronze, custom paint finishes.
Throughput	6 people per minute
Option	Metal detector
Variant	Cylindrical D
Variant benefit	850mm door opening is DDA compliant

Option summary:

- Disassembled booth
- Floor frame for the booth fixing to ground
- Metal upper cover
- Extension to increase the booth total height
- Metal detector placed outside the structure with automatic reset after each alarm
- Doors and side glasses 27mm BR3 (EN1063), P6B (EN356)
- 2 Ah built-in battery backup
- Internal/external support either for card or proximity reader
- Internal microcamera
- Door opening radar
- Biometric identification
- CCTV
- Additional console
- Input/output card (I/O)
- Wooden box packaging Electronics passive heating system that is thermostated for low temperatures.

Specifications subject to change without prior notice.