



# SPECIFICATIONS

## ABOUT THE CENTURION TWIN SECUREDOR





The Centurion Twin SecureDoor is the ideal security solution for facilities looking for dual access. The two entrances cater perfectly to high throughput buildings, and one variant is DDA compliant. Its design is stylish, spacious and predominantly made of glass with a slim steel frame to suit all types of facility designs. Its telescopic doors ensure a smooth user experience, while helping prevent tailgaters from entering unmanned areas.

It features digital voice communication to help guide users through the SecureDoor portal. It has accident prevention sensors and a weight control system to detect more than one person in the portal at any given time to ensure the safety of your visitors and your facility.



STANDARD TWIN SECUREDOR

TWIN SECUREDOR VARIANT

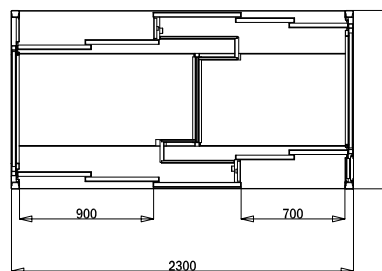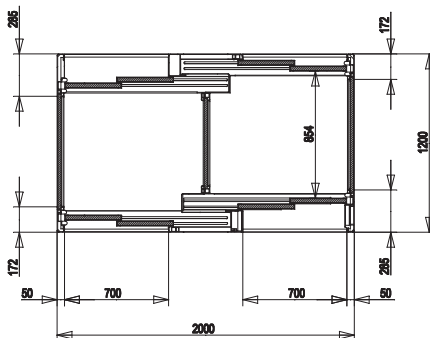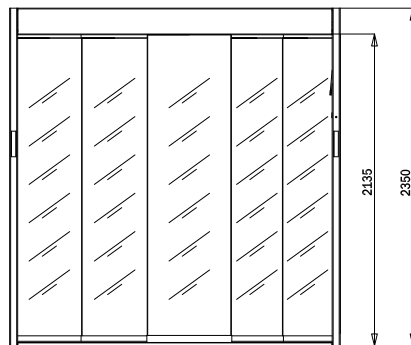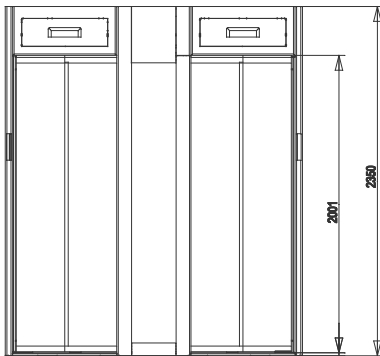

## CENTURION TWIN SECURE-DOOR SPECIFICATIONS

Door opening size	Two x 700mm lanes for a smaller footprint
Standard glass Thickness	Entry/exit glass 27mm thick with metal sides
Rating	BR3 (EN 1063), P6B (EN 356)
Optional glass thickness	Lateral glass 22mm thick
Rating	BR2 (EN 1063), P6B (EN 356)
Certification	See variant
Tailgate detection technology	Weight check
Door action	Motorised
DDA	See variant
Height	2350
Width	2300
Depth	1200
Standard finish	Paint finish and RAL colour
Bottom step height	30
Optional finishes	Brush or Polished Stainless steel, coloured stainless steel, bras, Bronze, custom paint finishes
Throughput	12 people per minute
Option	Metal detector
Variant	Twin D
Variant benefit	700mm and 900mm

### Option summary:

- Disassembled booth
- Floor frame for the booth fixing to ground
- Metal detector placed outside the structure with automatic reset after each alarm.
- Internal /External support either for card or proximity reader
- Internal microcamera
- Door opening radar
- Biometric identification
- CCTV
- Additional console
- Redundant opening system (dual independent opening system for manual opening of doors in case of malfunction)
- Input/output card (I/O)
- Wooden box packaging
- Electronics passive heating system that is thermostated for low temperatures.

Specifications subject to change without prior notice.