Entrance Control

# CheckPoint **606**

## COST-EFFECTIVE ACCESS CONTROL SOLUTION TO DIVIDE OFFICE SPACES

### KEY FEATURES

- Dependable space-saving security at mid-tier price point
- Retractable panel design – no swing arc required
- 1020mm-wide DDA-compliant lane to support accessibility
- Can be integrated with third-party access control systems
- White, black and stainless steel finishes available
- Fire alarm integration for emergency safety
- Six pairs of infrared sensors
- Low power consumption

The CheckPoint 606 is an entry-level sliding turnstile designed to secure stairwells, internal corridors and office spaces. It retracts a transparent panel to open and extends it to close – minimising the use of space required for an installation. A durable stainless-steel frame offers long-term reliability to control access at high throughput points.

### NARROW ACTION

With no swing arc required, the 606 is ideal for confined spaces such as stairwells and internal doorways, where a swinging barrier could obstruct passage or create a collision risk. Its retractable panel allows it to be installed close to walls, handrails or doors without compromising clearance.

### REMOTE CONTROL AND SAFETY

A desk-mounted control panel is an option to provide easy checkpoint management, while integrated sensors ensure safe operation. In case of fire, power failure or other emergencies, the 606's barriers can be manually or automatically opened to allow safe exit.

### ACCESSIBILITY

Available in both standard and wheelchair-accessible lane widths up to 1020mm, making the CheckPoint 606 DDA compliant.

### FLEXIBLE INSTALLATION

The 606 is compatible with the Floor Protector, allowing it to be installed without penetrating or damaging the floor, making it a practical choice for leased premises or entrance control that may need to be relocated in future.

Built-in IR sensors are designed to act as safety sensors to ensure the gate doesn't close if they are covered

## SPECIFICATIONS

| | |
|---|---|
| **Model No:** | 606 |
| **Type:** | Optical Sliding Turnstile |
| **Framework material:** | 304 stainless steel and tempered glass |
| **Tempered glass:** | 5mm thickness (standard)<br>8mm thickness (acrylic material optional) |
| **Dimensions:** | 1515 * 270 * 1100mm |
| **Net weight:** | 80kg/pcs |
| **Passage width:** | 1020mm (standard) |
| **Passing direction:** | Retractile |
| **MCBF:** | 5,000,000 |
| **Power supply:** | AC220V/110V, 50/60Hz |
| **Operation voltage:** | 24V DC |
| **Power consumption:** | 40W |
| **Operation temperature:** | -20 °C - 75 °C (can be customised) |
| **Operation humidity:** | 0 ~ 95% (no freeze) |
| **Working environment:** | Indoor/outdoor (shelter) |
| **Flow rate:** | 35 people per minute |
| **Gate open/close time:** | Programmable 1-60 seconds |
| **LED indicator:** | Constant indicator light on top<br>Three LED indicators strips:<br>green → entry, blue = moving through,<br>red × no entry |
| **Infrared sensor:** | Six pairs (standard) |
| **Card reader mount:** | Under the top of cabinet<br>Max. dimensions (100 * 100 * 25mm<br>(can be customised) |
| **Emergency:** | Automatic panel opens when power off |
| **Communication:** | Dry contact, relay signal, RS485 |
| **Flexibility:** | Can integrate with any access control system |

*Note: Specifications subject to change without prior notice.*

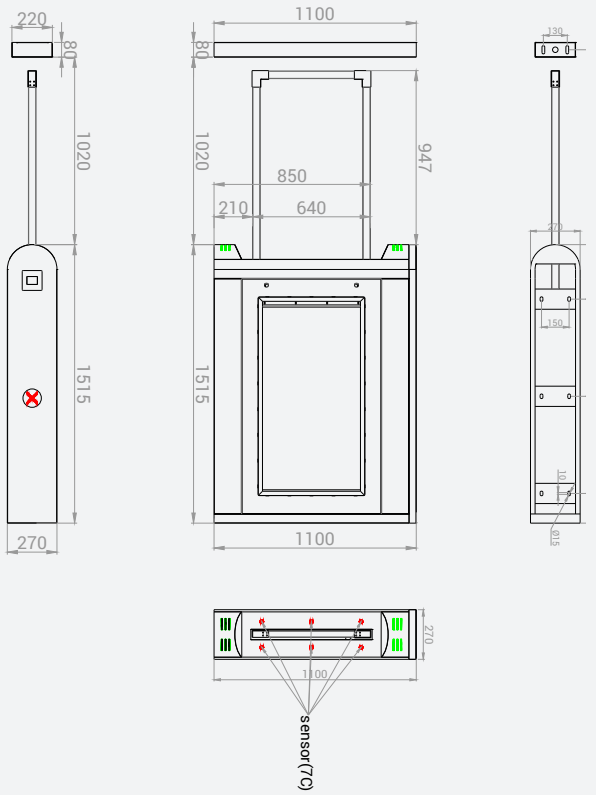


## ABOUT ENTRANCE CONTROL

Entrance Control is the exclusive distributor for some of the world's most prestigious entrance control brands that are used to protect leading corporations, governments, leisure and education facilities as well as retailers around the globe. The products highlighted in this brochure are just some of the options available that make up the Entrance Control portfolio of entrance control solutions.

With over 18 years' experience Entrance Control is the ideal choice of partner for all your entrance control requirements. Entrance Control offers supply only to full turnkey installation projects and has a variety of flexible support and maintenance options to ensure the ongoing reliable operation of your entrance control solution all backed by a Sydney based 24/7 telephone support helpline.