
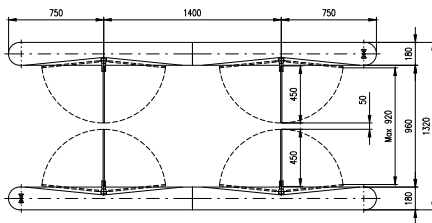
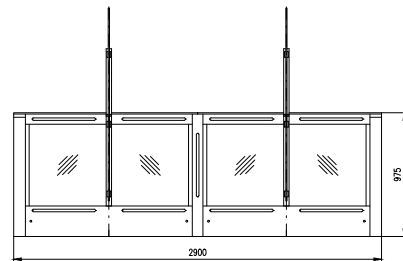



EASYGATE HS

SECURE. INTERLOCKING DOORS. EFFECTIVE.

CENTAMAN
Entrance Control

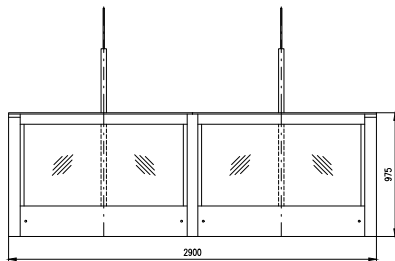

AT A GLANCE

- MTBF of 5,000,000 operations
- 36 Month Warranty
- DDA compliant
- Throughput – Up to 1 person per 2 seconds

SPECIFICATIONS

DIMENSIONS

Standard:	2900mm(L) x 210mm(W) x 975mm(H)
Wide:	2900mm(L) x 210mm(W) x 975mm(H)
Barrier Height:	995mm/1200mm/ 1800mm
Lane width:	600mm/920mm
Gap Between barriers:	80mm
Gap at Bottom of Glass:	300mm
MBTF:	5,000,000 operations
Warranty:	36 months
Sensor:	Up to 75 sensor pairs
Power Supply Input:	230 volts
Control Electronics:	12 V DC
Current:	Standby 0.4 A
Consumption:	Operational 6 A

Operating Temp:	10°C to 50°C (with heater)
Motor:	12 V DC
Operation Mode:	Normally Closed
Control:	Card In / Card Out Card In / No Exit Card In / Free Exit Locked Free Passage
Pictograms:	Wait Mode (White Indicator) Access Granted (Green Indicator) Illegal Transaction (Red Indicator)

Barrier Opening Time (Standard lane): 0.5 seconds

MATERIALS

Top Cover:	8mm Tempered Safety Glass Top
Front Cover:	Brushed Stainless Steel
Side Panels:	Brushed Stainless Steel
Frame:	Steel

Specifications subject to change without prior notice.