

EASYGATE SPT



SECURE. ELEGENT. SPACE-SAVING.



EASYGATE SPT-G 1200

EASYGATE SPT-G 1800

EASYGATE SPT-R

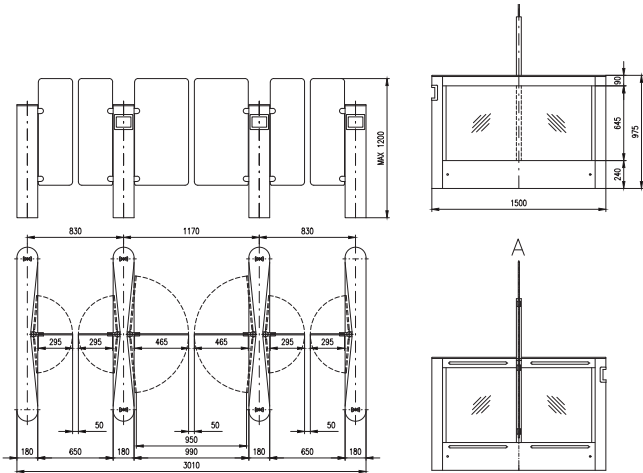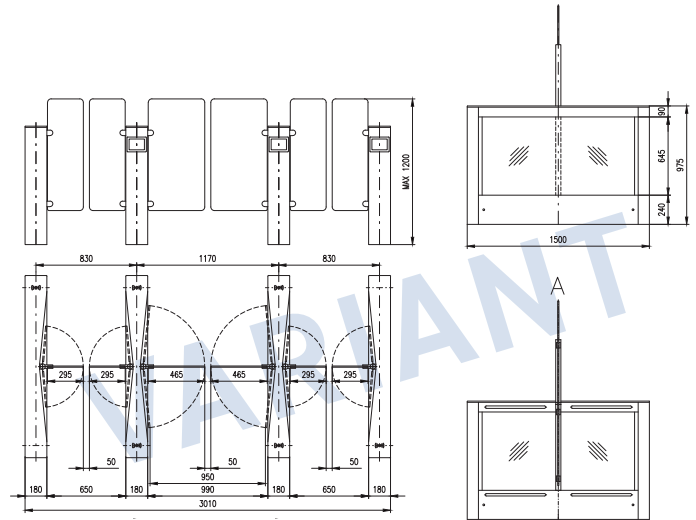

AT A GLANCE

- Available models: EasyGate SPT-G and EasyGate SPT-R in your choice of square or round end pedestal
- Barrier opening time: from 0.5 seconds
- MTBF: 5,000,000 operations
- 36 month warranty
- DDA Compliant

SPECIFICATIONS

DIMENSIONS

Standard:	1500mm(L) x 180mm(W) x 999mm(H)
Barrier Height:	1200 mm –1800mm
Lane width:	550mm – 1050mm (customisable)
Gap Between barriers:	50mm
MBTF:	5,000,000 operations
Warranty:	36 months
Sensors:	Up to 36 sensor pairs
Power Supply Input:	230 volts
Control Electronics:	13.8 V DC
Current:	Standby 0.4 A
Consumption:	Operational 6 A

Operating Temp:	-20°C to 50°C (with heater)
Motor:	13.8 V DC
Operation Mode:	Normally Closed
Control:	Card In / Card Out Card In / No Exit Card In / Free Exit Locked Free Passage
Pictograms:	Wait Mode (White Indicator) Access Granted (Green Indicator) Illegal Transaction (Red Indicator) Optional 3 colour LED indicators on glass barrier
Barrier Opening Time (Standard lane):	0.5 Seconds

MATERIALS

Top Cover:	8mm Tempered Safety Glass
Front Cover:	Stainless Steel
Side Panels:	Stainless Steel
Frame:	Steel

Specifications subject to change without prior notice.