# EASYGATE SPT

**SECURE. ELEGANT. SPACE-SAVING.**

Entrance Control

### EASYGATE SPT-G 1200

### EASYGATE SPT-G 1800

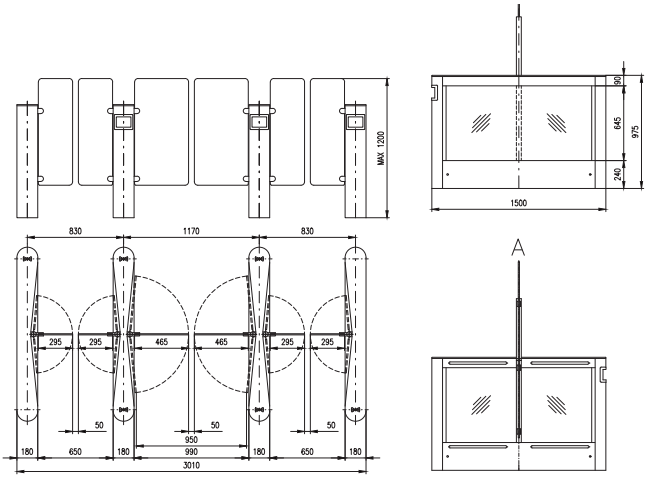


### EASYGATE SPT-R

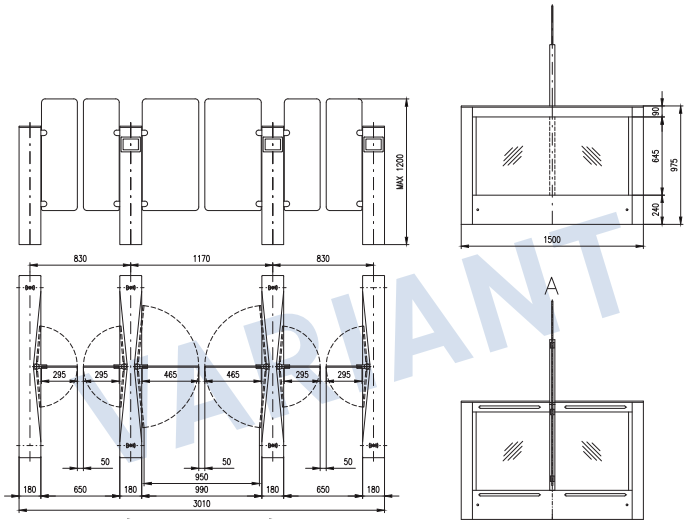


## AT A GLANCE

- Available models: EasyGate SPT-G and EasyGate SPT-R in your choice of square or round end pedestal
- Barrier opening time: from 0.5 seconds
- MTBF: 5,000,000 operations
- 36 month warranty
- DDA compliant

## SPECIFICATIONS

### DIMENSIONS

| | |
|---|---|
| **Standard:** | 1500mm(L) x 180mm(W) x 999mm(H) |
| **Barrier Height:** | 1200 mm –1800mm |
| **Lane width:** | 550mm – 1050mm (customisable) |
| **Gap Between barriers:** | 50mm |
| **MBTF:** | 5,000,000 operations |
| **Warranty:** | 36 months |
| **Sensors:** | Up to 36 sensor pairs |
| **Power Supply Input:** | 230 volts |
| **Control Electronics:** | 13.8 V DC |
| **Current:** | Standby 0.4 A |
| **Consumption:** | Operational 6 A |

| | |
|---|---|
| **Operating Temp:** | -20°C to 50°C (with heater) |
| **Motor:** | 13.8 V DC |
| **Operation Mode:** | Normally Closed |
| **Control:** | Card In / Card Out Card In / No Exit Card In / Free Exit Locked Free Passage |
| **Pictograms:** | Wait Mode (White Indicator)<br>Access Granted (Green Indicator)<br>Illegal Transaction (Red Indicator)<br>Optional 3 colour LED indicators on glass barrier |
| **Barrier Opening Time (Standard lane):** | 0.5 Seconds |

### MATERIALS

| | |
|---|---|
| **Top Cover:** | 8mm Tempered Safety Glass |
| **Front Cover:** | Stainless Steel |
| **Side Panels:** | Stainless Steel |
| **Frame:** | Steel |

Specifications subject to change without prior notice.

For Remote Turnstile Maintenance access to the sites network is required and the service is subject to a support agreement