


EASYGATE Superb

SLIM. VERSATILE. ADVANCED.

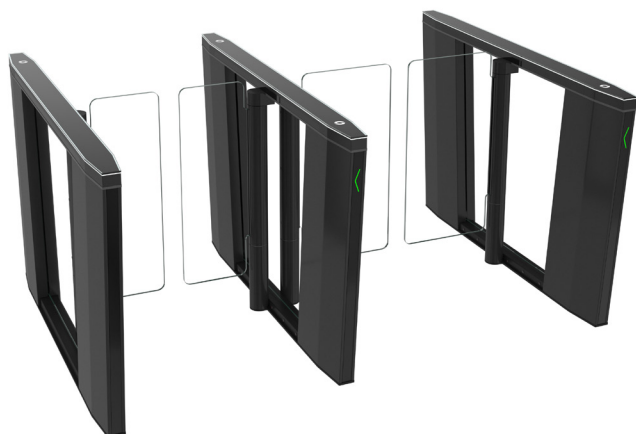

PASSAGE WIDTH 2 wings ^{b)}	HEIGHT OF GLASS BARRIER		
	990	1200	1800
550	•	•	•
650	•	•	•
750	•	•	•
800	•	•	•
900	•	•	•
920	•	•	•
1000	•	•	—
1100	•	•	—

AT A GLANCE

- The slimmest speedgate available
- Choice of customisation options
- Advanced security features
- DDA compliant

SPECIFICATIONS

DIMENSIONS

Standard:	1580mm(L) x 99mm(W) x 990mm(H)
Barrier Height:	990mm – 1800mm
Lane width:	550mm – 920mm (customisable)
Gap Between barriers:	80mm
MBTF:	3,000,000 operations
Warranty:	24 months
Sensors:	Up to 24 sensor pairs
Power Supply Input:	230 volts
Control Electronics:	12 V DC
Current:	Standby 0.4 A
Consumption:	Operational 6 A

Operating Temp:	10°C to 50°C (with heater)
Motor:	12 V DC
Operation Mode:	Normally Closed
Control:	Card In / Card Out Card In / No Exit Card In / Free Exit Locked Free Passage
Pictograms:	Wait Mode (White Indicator) Access Granted (Green Indicator) Illegal Transaction (Red Indicator)
Barrier Opening Time (Standard lane):	0.7 Seconds

MATERIALS

Top Cover:	8mm Black Glass (other options available)
Front Cover:	Stainless Steel
Side Panels:	Stainless Steel
Frame:	Steel

Specifications subject to change without prior notice.