Entrance Control

FullHeight Gate **6004**

WIDE-ACCESS, DDA-COMPLIANT SECURITY GATE

KEY FEATURES

- Secure access for deliveries and wide loads
- Available in manual key, electric bolt or motorised versions
- Remote control (if connected to access control system)
- Fire alarm integration (if connected to access control system)
- Robust 304 stainless steel construction
- Suitable for outdoor environments
- One-way or two-way gate opening

The FullHeight Gate 6004 is a steel bar door that can operate on its own or alongside a full-height turnstile to provide access for deliveries, wheelchair users and others who need more room than a turnstile allows. This offers a practical access control solution for construction sites, warehouses, distribution centres, transport facilities, banks, embassies and other perimeter access scenarios where absolute entrance control is non-negotiable. This gate is constructed with a premium 304 stainless steel finish.

WIDE ACCESS

With a 900mm lane width and one-way or two-way gate opening options, the 6004 comfortably accommodates wheelchairs, trolleys and deliveries alongside pedestrian traffic – making it a good companion for the FullHeight Turnstile 411.

SOLID SECURITY

Built with durable 304 brushed stainless steel, the 6004 is reliably robust and suitable for outdoor environments. Three versions are available at different price points for manual key opening, or activated with either an electric bolt or motor, if connected to an access control system.

REMOTE CONTROL AND SAFETY

A desk-mounted control panel is available to operate the gate remotely. In case of fire, power failure or other emergencies, the FullHeight Gate 6004's arms open automatically to allow safe exit. The key-operated version can only be opened manually.

ACCESSIBILITY

The FullHeight Gate 6004 is DDA compliant with its 900mm-wide wheelchair-accessible lane.

FLEXIBLE INSTALLATION

The 6004 is compatible with the Floor Protector, allowing for a free-standing installation without penetrating or damaging the floor. This makes it a practical choice for construction sites where it can be removed when no longer required, or for leased premises or entrance control that may need to be relocated in future.

SPECIFICATIONS

Model No:	6004
Type:	Full-height security gate
Framework material:	304 stainless steel
Dimensions:	1200 * 260 * 2300mm
Inner height:	2080mm
Net weight:	65kg/pcs
Passage width:	900mm/lane
Passing direction:	Single directional/bi-directional
MCBF:	5,000,000
Power supply:	AC220V/110V, 50/60Hz
Operation voltage:	24V DC
Power consumption:	40W
Operation temperature:	-15 °C - 60 °C
Operation humidity:	0 ~ 95% (no freeze)
Working environment:	Indoor/outdoor
Flow rate:	30 people per minute
LED indicator:	green → entry and red × no entry (electric versions only)
Emergency:	Gate will open automatically (if connected to access control system)
Communication:	Dry contact, relay signal, RS485
Flexibility:	Can integrate with any access control system

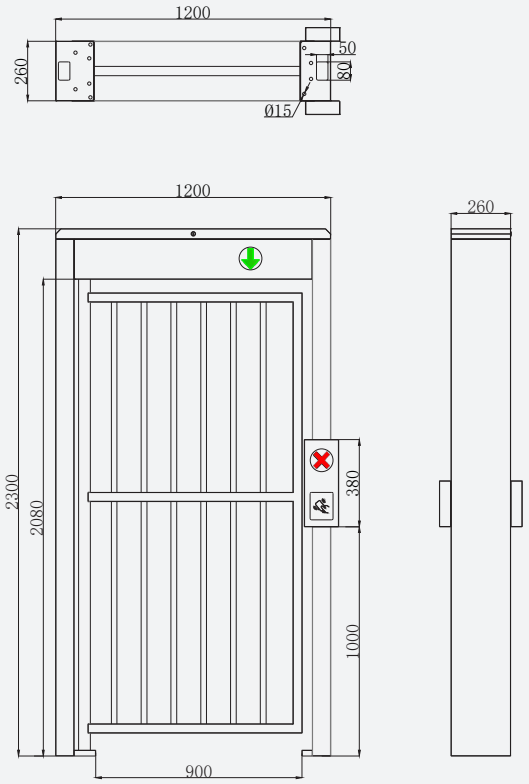

Note: Specifications subject to change without prior notice.

ABOUT ENTRANCE CONTROL

Entrance Control is the exclusive distributor for some of the world's most prestigious entrance control brands that are used to protect leading corporations, governments, leisure and education facilities as well as retailers around the globe. The products highlighted in this brochure are just some of the options available that make up the Entrance Control portfolio of entrance control solutions.

With over 18 years' experience Entrance Control is the ideal choice of partner for all your entrance control requirements. Entrance Control offers supply only to full turnkey installation projects and has a variety of flexible support and maintenance options to ensure the ongoing reliable operation of your entrance control solution all backed by a Sydney based 24/7 telephone support helpline.